

EXBOX.MD

DANTE / MADI CONVERTER



DirectOut GmbH
Leipziger Str. 32 | D-09648 Mittweida
info@directout.eu | www.directout.eu

DirectOut
TECHNOLOGIES

EXBOX.MD

is an Audio-over-IP to MADI converter based on Audinate's audio networking technology Dante. Equipped with three MADI ports and four network ports it offers straight-forward conversion of 64 audio channels between MADI and Dante.

The handy size of the popular EXBOX series (1/3 of 19"), combined with the rock-solid housing and redundant power supplies, makes the EXBOX.MD a perfect connectivity tool for touring live shows, OB vans as well as studio applications.

Audio Streaming

Up to 32 streams with a total number of 64 audio channels are supported. The device also features the latest Dante firmware with activated AES67 support.

All-Round Functionality

EXBOX.MD offers highest flexibility as it provides three MADI ports of different interface types:

- optical SC (single-mode or multi-mode)
- coaxial (BNC)
- SFP

The Small Form Factor Pluggable cage can be fitted with any SFP module suitable for the particular application.

FastSRC™

The FastSRC™ is a low latency sample rate converter, switchable for the Dante I/O, and ensures seamless exchange between MADI and Dante I/O when both sources are not synchronised.

EARS™

Enhanced Automatic Redundancy Switching™ is a system to prevent interruption of the output signal. It uses either the proven BLDS™ technology or pilot tone triggering. A logic monitors the condition of the trigger signal on the Dante input. In case of a failure it switches automatically to the backup input (Dante or MADI).

Remote control

EXBOX.MD can be controlled by Audinate's remote software 'Dante Controller' and is 'Dante Domain Manager' ready. Device functions, such as the channel based routing matrix, FastSRC™ or EARST™ are accessible via globcon and a browser UI.

TECHNICAL DETAILS

| | |
|---------------------------|--|
| MADI Ports (I/O): | 1 x SC-Socket multi/single-mode 1 x coaxial BNC, 75 Ω * 1 x SFP (empty cage without module) ** |
| Network: | 3 x RJ45 (1 Gbit/s) 1 x RJ45 (1 Gbit/s, PoE) |
| Sample Rates: | 44.1, 48, 88.2, 96, 176.4, 192 kHz (+/- 12,5%) |
| MADI Formats (I/O): | 48k Frame, 96k Frame, 56/64 channel, S/MUX |
| Sample Rate Converter: | FastSRC™ for Dante I/O |
| Network-Layer: | 3 |
| Number of Streams: | 32 |
| Number of Channels (I/O): | 64 (@1 FS), 32 (@2 FS), 16 (@4 FS) |
| Network Standards: | Dante, AES67 |
| Power Supply: | 2 x Hirose DC input (7- 24 V) 1 x RJ45, Power over Ethernet |
| Dimensions: | Width 140 mm Height 42 mm Depth 140 mm |
| Weight: | about 0.8 kg |

* BNC input is switchable to word clock input

** optional accessory: SFP modules (LC single-mode or multi-mode)

Safe operation


The device can be powered by up to two external power-supplies as well as PoE (Power over Ethernet).

Built-in Switch

Four network ports are connected to an internal switch and give the opportunity to use Dante's redundancy mode (Primary <> Secondary), while more EXBOX.MDs or other Dante devices can be connected in switched mode directly to increase the number of channels.

Rack-Ready

EXBOX.MD can be mounted into a standard 19"-rack by using the optional kit BOXMOUNT.XL. Up to three devices may fit side-by-side within 1 RU.

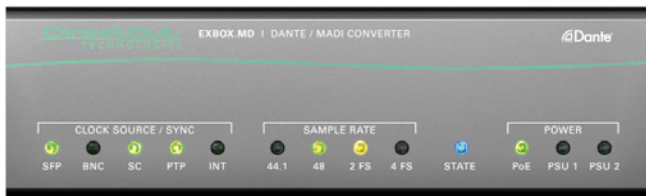

Remote Methods:

