


RAV.IO

User's Manual

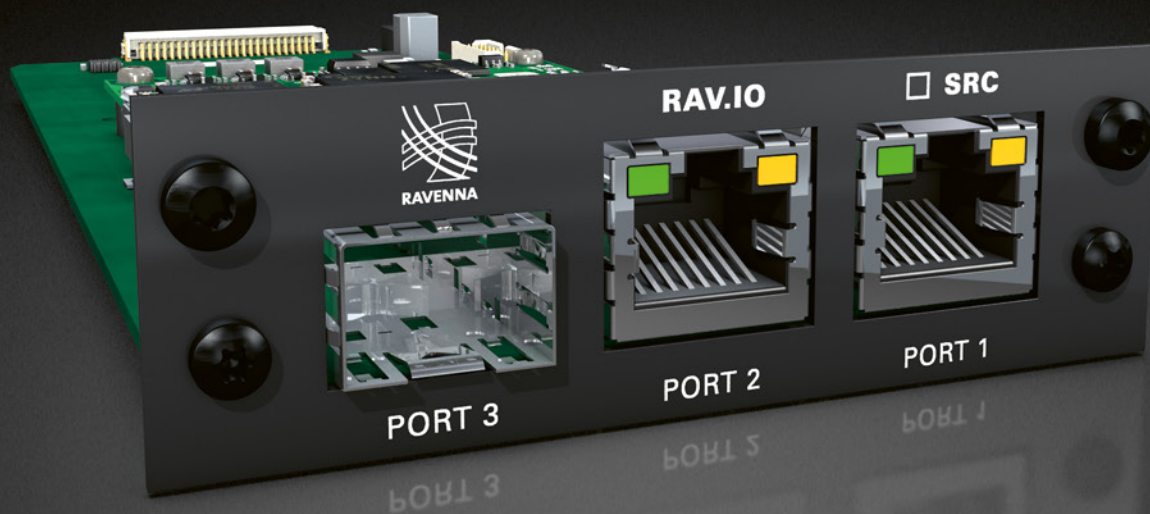

Copyright

All rights reserved. Permission to reprint or electronically reproduce any document or graphic in whole or in part for any reason is expressly prohibited, unless prior written consent is obtained from the DirectOut GmbH.

All trademarks and registered trademarks belong to their respective owners. It cannot be guaranteed that all product names, products, trademarks, requisitions, regulations, guidelines, specifications and norms are free from trade mark rights of third parties.

All entries in this document have been thoroughly checked; however no guarantee for correctness can be given.

DirectOut GmbH cannot be held responsible for any misleading or incorrect information provided throughout this manual.

DirectOut GmbH reserves the right to change specifications at any time without notice.

DirectOut Technologies® is a registered trademark of the DirectOut GmbH.

© DirectOut GmbH, 2026

Table of contents

RAV.IO	4
Introduction	4
Connecting Audio Network	5
Status - Overview	5
Status - Sync	6
Status - Network	9
Status - Device	12
Status - Input Streams.....	16
Status - Output Streams.....	30
Advanced - Overview	42
Advanced - PTP Settings.....	43
Advanced - PTP Unicast	45
Advanced - PTP Profile Customized Settings.....	46
Advanced - Current PTP Master.....	47
Advanced - PTP Statistic	48
Advanced - PTP Clock Setting.....	49
Advanced - Network Advanced Settings	50
Advanced - PTP Jitter.....	51
NMOS - Overview.....	52
NMOS port - NIC1 & NIC2	52
NMOS registry - Search mode	53
NMOS - Internal	54
NMOS - Additional Settings	55
Logging	56
Statistic.....	58
Switch	59
Tools	60
RAV.IO - Firmware Update	65
Index	66

RAV.IO


Introduction

RAV.IO is an audio network module for RAVENNA / AES67. It is hosted in a PRODIGY or MAVEN.A mainframe.

All functions are accessible through a browser based interface (html5 / javascript).

The size of the window and the zoom level can be varied. The page is organized in tabs, pulldown menus or hyperlinks offer access to the values of a parameter.

Some values use an input field (e.g. IP address).

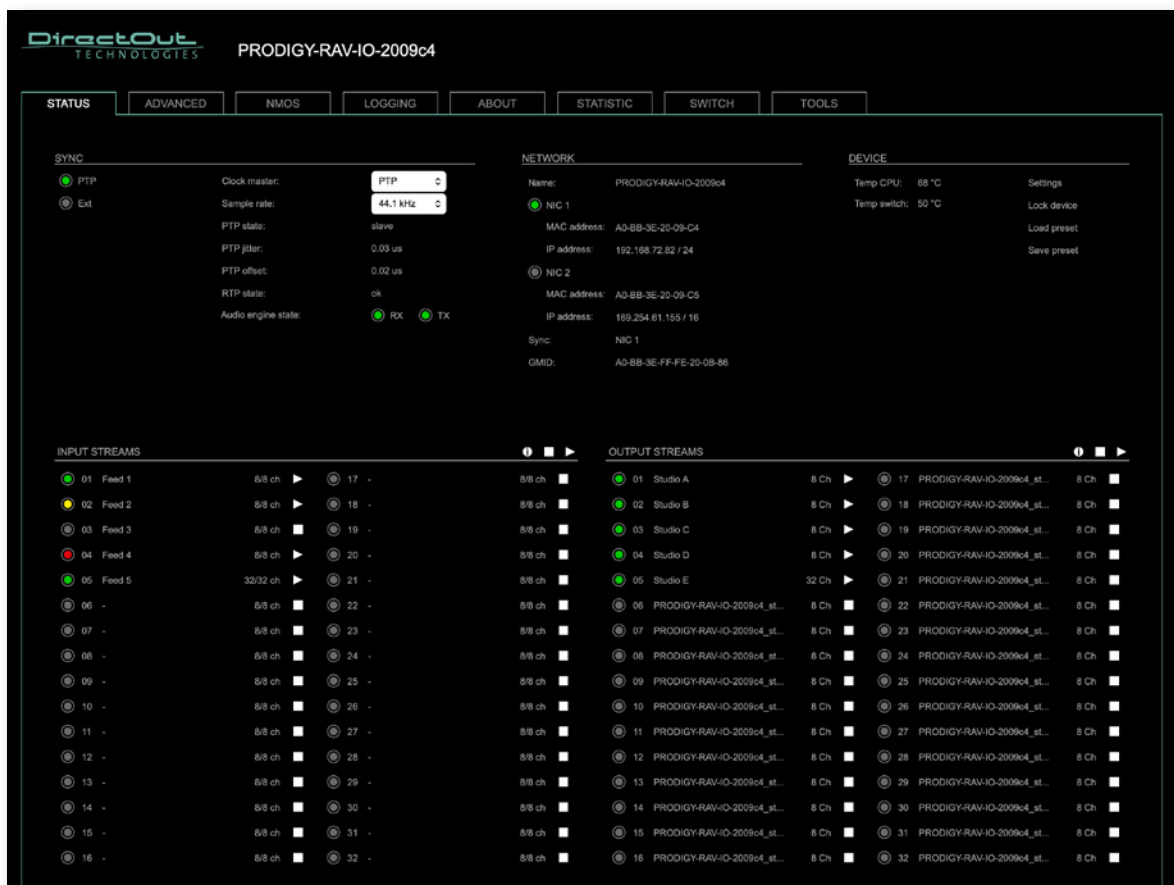

NOTE

Refers to module software: SW 01.30 / HW 0.38

Connecting Audio Network

To access the control page:

- connect the network with one port
- enter `http://<IP Address>` in the navigation bar of your browser
(default IP @ PORT 1: 192.168.0.1 or DHCP @ PORT 2)

The three physical network ports (Port 1 to 3) are managed by two independent internal network interfaces (NIC 1 / NIC 2).

Port 1, 2 and 3 can be assigned to either NIC 1 or NIC 2 on the SWITCH tab - see p 59.

NOTE



If NIC 1 and NIC 2 are connected to the same switch, they must be configured to different subnets - see "Network Settings" on page 10.

Status - Overview

The tab 'STATUS' is divided into several sections:

- SYNC - monitoring sync state, clock selection, links to I/O settings
- NETWORK - display network info, link to network settings
- DEVICE - monitoring device info, link to device settings, phones level control
- INPUT STREAMS - monitoring and control input streams, link to input stream settings
- OUTPUT STREAMS - monitoring and control output streams, link to output stream settings

Hyperlinks open a popup window to adjust related settings. Most settings are updated immediately without further notification. To exit a popup window click the button in the top right corner.


Mouse overs are used to display further information (e.g. connection speed of network link).

NOTE



The web user interface updates itself when changes are applied by other instances (other browsers, external control commands).

Status - Sync

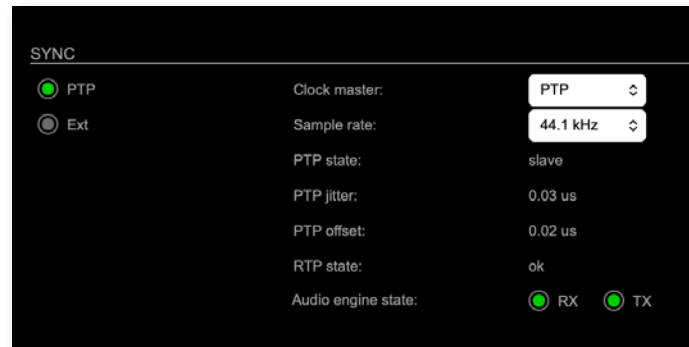

PTP, Ext	Displays clock source and state for the main frame: ☐ (OFF) = not locked ☒ (ON) = locked and in sync with clock master ☐ (blinking) = locked but not in sync with clock master
Clock master	Pulldown menu to select clock source of the main frame (PTP, extern)
Sample rate	Pulldown menu to adjust sample rate of the main frame (44.1 / 48 / 88.2 / 96 / 176.4 / 192 kHz).
PTP state	State of PTP (Master / Slave).
PTP jitter	PTP-clock jitter per second
PTP offset	Offset relative to PTP-clock master
RTP state	Status of packet processing (OK, Error*)
Audio engine RX state	State of module's audio engine- receiving ☒ (ON) = ok, receiving data ☐ (blinking) = not all received packets can be processed
Audio engine TX state	State of module's audio engine- sending ☒ (ON) = ok, sending data ☐ (blinking) = not all packets can be sent to the network


* Error: packet time stamps are out of bounds.

Possible reasons: stream offset may be too small or transmitter or receiver are not synced properly to the Grandmaster.

Hyperlinks:

- [PTP / PTP state \(p 7\)](#)

PTP Settings

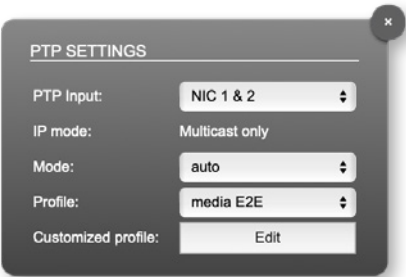


PTP Input	NIC selection for PTP clock input. 'NIC 1 & 2' means input redundancy.
IP Mode	PTP via multicast, unicast or in hybrid mode. *
Mode	PTP-clock master / slave configuration is auto negotiated between devices in the network. Module's master / slave state may change automatically.
Profile	PTP profile selection (default E2E, default P2P, media E2E, media P2P, SMPTE 2059-2, customized)
Customized profile	Edit opens the tab 'ADVANCED' to adjust the custom profile.

See "Advanced- PTP Settings" on page 43 for more details.

This page is left blank intentionally.

Status - Network

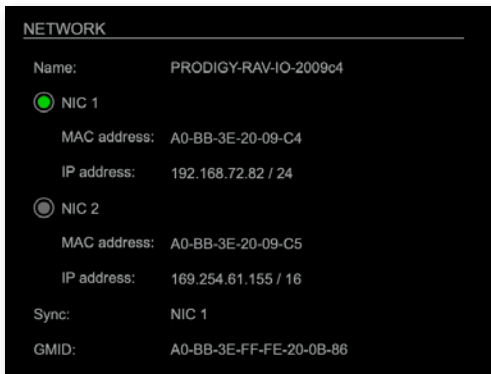

Name	Module's name in the network. Used e.g. for mDNS service. The name needs to be unique throughout the network.
NIC 1 / NIC 2	Monitoring state of network interface controller ☐ (OFF) = not connected ☒ (ON) = connected with the network
MAC address	Hardware identification of network interface controller.
IP address	IP address of device plus CIDR info (subnet mask)*
Sync	Selected NIC for PTP sync
GMID	Grand Master ID (PTP)

* Classless Inter Domain Routing - CIDR prefix is another notation for a subnet mask.

Hyperlinks

- Name / IP address (p 10)

Mouse over:

- LED NIC 1- indicating link state and connection speed
- LED NIC 2- indicating link state and connection speed

NOTE

If NIC 1 and NIC 2 are connected to the same switch, they must be configured to different subnets - see "Network Settings" on page 10.



Network Settings

The two network interface controllers (NIC 1 / NIC 2) are configured individually.

Device name:

PRODIGY-RAV-IO-2009

TCP port HTTP:

80

TCP port RTSP:

554

TTL RTP packets:

128

DSCP RTP packets:

AF41 (0x22)

DSCP PTP packets:

CS6 (0x30)

NIC 1

Dynamic IP address (IPv4):

☐

Static IP address (IPv4):

☒

IP address (IPv4):

192.168.72.82

Subnet mask (IPv4):

255.255.255.0

Gateway (IPv4):

192.168.72.1

DNS server (IPv4):

0.0.0.0

IGMP NIC 1:

auto

Accept multicast from other subnet:

yes (default)

Direct routing (multicast transfer only):

☐ Host IP address 1: 0.0.0.0
☐ Host IP address 2: 0.0.0.0
☐ Host IP address 3: 0.0.0.0
☐ Host IP address 4: 0.0.0.0
☐ Host IP address 5: 0.0.0.0
☐ Host IP address 6: 0.0.0.0
☐ Host IP address 7: 0.0.0.0
☐ Host IP address 8: 0.0.0.0
☐ Host IP address 9: 0.0.0.0
☐ Host IP address 10: 0.0.0.0

NIC 2

Dynamic IP address (IPv4):

☒

Static IP address (IPv4):

☐

IP address (IPv4):

169.254.61.155

Subnet mask (IPv4):

255.255.0.0

Gateway (IPv4):

0.0.0.0

DNS server (IPv4):

0.0.0.0

IGMP NIC 2:

auto

Accept multicast from other subnet:

yes (default)

Direct routing (multicast transfer only):

☐ Host IP address 1: 0.0.0.0
☐ Host IP address 2: 0.0.0.0
☐ Host IP address 3: 0.0.0.0
☐ Host IP address 4: 0.0.0.0
☐ Host IP address 5: 0.0.0.0
☐ Host IP address 6: 0.0.0.0
☐ Host IP address 7: 0.0.0.0
☐ Host IP address 8: 0.0.0.0
☐ Host IP address 9: 0.0.0.0
☐ Host IP address 10: 0.0.0.0


Apply

page 10 of 68

RAV.IO Manual - Version 3.1

Device name	Input field - Module's name in the network. Used e.g. for mDNS service. The name needs to be unique throughout the network.
TCP port HTTP	TCP port for HTTP
TCP port RTSP	TCP port for RTSP
TTL RTP packets	Time-To-Live of RTP packets - default: 128
DSCP RTP packets	DSCP marking of QoS of RTP packets - default: AF41
DSCP PTP packets	DSCP marking for QoS of PTP packets - default: CS6*
Dynamic IP address (IPv4)	Switch to enable the device's DHCP client. IP address is assigned by DHCP server. If no DHCP is available the IP address is determined via Zeroconf.
Static IP address (IPv4)	Switch to disable the device's DHCP client. Manual configuration of network parameters.
IP address (IPv4)	Module's IP Address
Subnet mask (IPv4)	Module's subnet mask
Gateway (IPv4)	IP address of gateway
DNS server (IPv4)	IP address of DNS server
IGMP NIC 1 / NIC 2	Definition or auto-select of IGMP version used to connect to a multicast router at NIC 1 / NIC 2.
Accept multicast from other subnet	Setting of return path filter (rp filter) to accept or refuse multicast packets from different subnets. Values: yes (default), no
Apply	Button to confirm changes. Another popup window will appear to confirm a reboot of the module.
Direct routing	IP addresses of devices outside the subnet, to enable multicast traffic; e.g. Grandmaster or IGMP querier. Mark checkbox to activate.

Status - Device

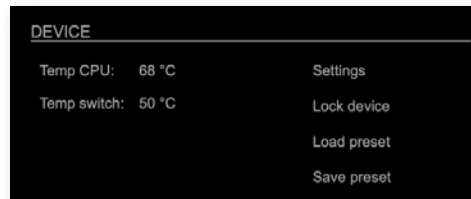


Temp CPU	Display temperature of CPU core in degree Celsius. It may reach 95 °C without effecting the performance of the device.
Temp switch	Display temperature of network switch in degree Celsius
Settings	Opens a popup window to configure the device.
Lock Device	Lock or unlock the device control. A password is required, it can be defined in the 'Settings'.
Load preset	Opens a dialog to store the device settings to a file. Filetype: .rps
Save preset	Opens a dialog to restore the device settings from a file. Filetype: .rps

Hyperlinks:

- [Settings \(p 12\)](#)
- [Lock device \(p 14\)](#)
- [Load preset \(p 13\)](#)
- [Save preset](#)


Settings

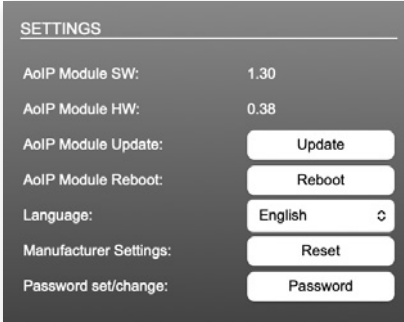

AoIP Module SW	Module's software version. It is updated together with hardware version via network.
AoIP Module HW	Module's bitstream version. It is updated together with software version via network.
AoIP Module Update	Opens a dialog for selection of the update file - see "RAV.IO- Firmware Update" on page 65.
AoIP Module Reboot	Restart of the AoIP module. Confirmation required. Audio transmission will be interrupted.
Language	Menu language (english, german).
Manufacturer Settings Reset	Restore device settings to factory defaults. Confirmation required. *
Password set/change	Opens dialog to set or modify the device password.

* Reset to factory defaults is also possible via globcon - see p 14.

Password



A dialog box titled "PASSWORD CHANGE" with three input fields: "Old password:", "New password:", and "Confirm password:". Below the fields are "OK" and "Cancel" buttons.


Requirements:

- password length: 8 to 30 characters
- password must not contain characters <#> and ,<space>.

If the password is lost, access can be regained by resetting to factory defaults in globcon.

Reset via globcon / Password Reset

1. Open Settings/Slots
2. Click the settings symbol

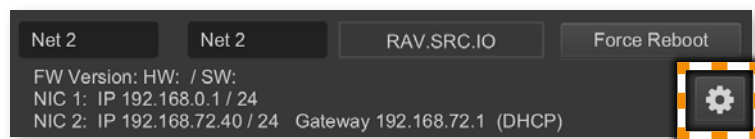

3. Click Factory Reset




Lock Device



A dialog box titled "LOCK DEVICE" with a "Password:" input field. Below the field are "OK" and "Cancel" buttons.


To prevent from unauthorized access, remote operation can be restricted to monitoring display only.

Load Preset

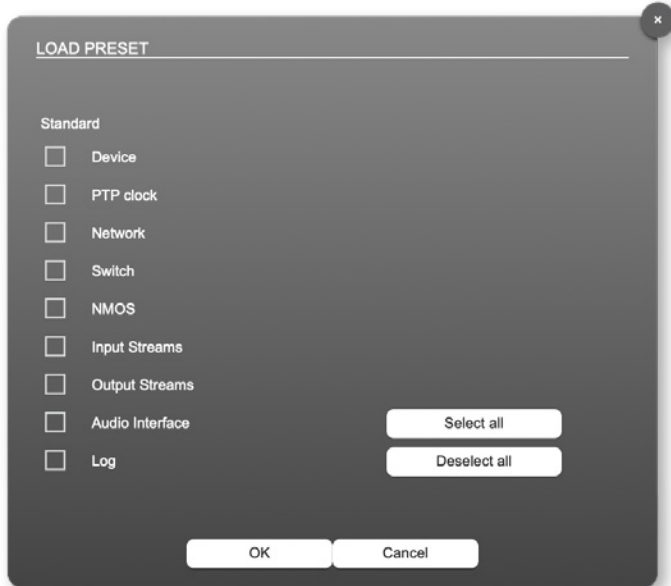

The device configuration can be stored to a single file (.rps). Restoring the configuration a dialog prompts for selection of individual settings. This enhances flexibility at setup changes when a particular adjustment shall be preserved or just a single adjustment shall be restored.

Status - Input Streams

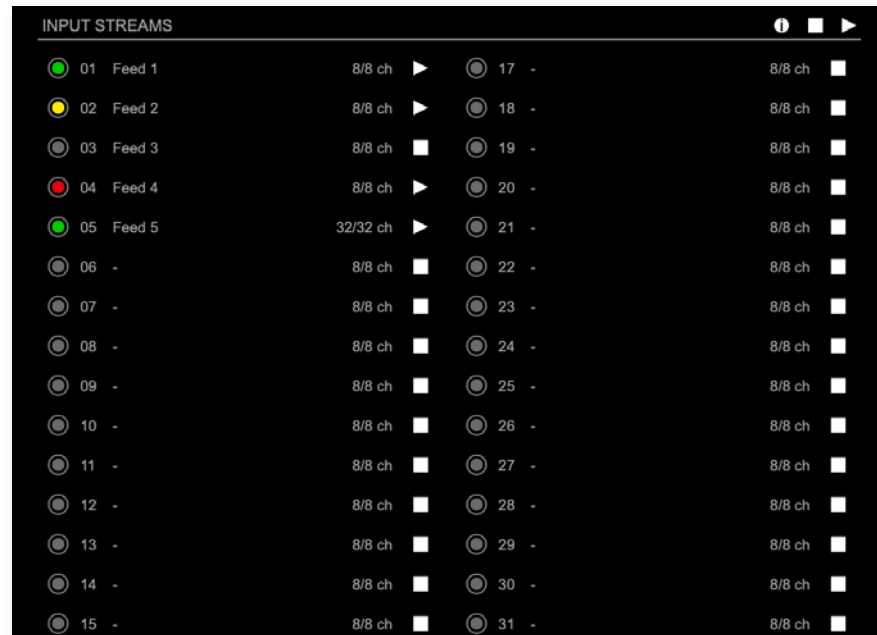

The module can subscribe up to 32 streams. The overview displays the basic information of each stream. The input stream name can be set manually (discovery protocol: manually, see page p 27) overriding the SDP's stream name information. Single channels can be picked from a stream (see "" on page 22).


A backup stream can be defined as source after an adjustable timeout. A central active / inactive switch allows to toggle the stream state of all input streams at once.

01 to 32	State of incoming streams ○ (OFF) = stream not activated ● (ON) = stream activated, receiving data ● (ON) = stream activated, receiving data via one NIC only (input redundancy) ⚡ (blinking) = stream activated, not receiving data (unicast, connection not established)
01 to 32 Name	Name of stream gathered from SDP or set manually in the stream settings dialog.
01 to 32 xx ch	Number of audio channels transported by the stream




01 to 32 ■ ▶	Click to activate or deactivate single stream. ▶ = stream activated ■ = stream deactivated = stream not active, defined as backup-stream
INPUT STREAMS ■ ▶	Click to activate or deactivate all streams. ▶ = activate all streams ■ = deactivate all streams (requires confirmation)
INPUT STREAMS i	Click i to display input streams overview

Input Streams Overview

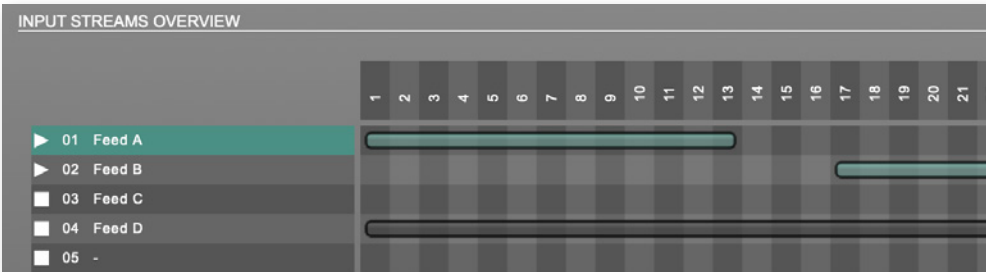

green = stream active
grey = stream not active

Channel selection of stream 1

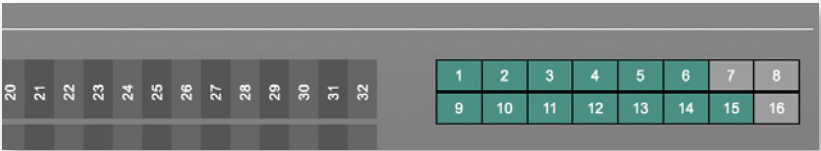

green = channel is received and used
grey = channel is ignored

Backup Streams

01 - INPUT STREAM SETTINGS

Activate Stream:

☐

Stream Input:

NIC 1 & 2

Backup Stream:

3

Backup Stream Timeout:

1s

Example:

Backup stream (input 3) that will act as source in the audio matrix if the current session (input 1) fails. Switch-over occurs after the defined timeout (1s). Stream 3 is marked accordingly in the status view

INPUT STREAMS						■	▶
01	TV-MIX stereo	2 ch	■	17	-	8 ch	■
02	TV MIX Surround	6 ch	▶	18	-	8 ch	■
03	Radio-Mix	2 ch	▶	19	-	8 ch	■
04	Multi-Track	32 ch	▶	20	-	8 ch	■

Input 1 failed and Input 3 becomes active after the timeout.



NOTE

In case the main input fails the main stream is stopped (IGMP LEAVE) before the backup stream is being activated. This behaviour ensures that the required network bandwidth does not increase in case of a failure.



Hyperlinks:

- Name (p 20)

Mouse over:

- LED- indicating stream state

NOTE



Source-Specific Multicast (SSM) support for IGMP v3, v2 and v1 (SSM via protocol only in IGMP v3, SSM via internal filtering is applied for IGMP v2 and v1) - see "Source Specific Multicast" on page 27.

Input Stream Settings

01 - INPUT STREAM SETTINGS

Activate Stream:

☐

Stream Input:

NIC 1

Backup Stream:

disabled

Backup Stream Timeout:

1s

Stream name:

16 channel

Stream state:

connected

Stream state messages:

Stream state offset max (samples):

23

Stream state offset min (samples):

0

Stream state ip address src NIC 1 / NIC 2:

239.69.1.10 / -

Stream state connection lost (Events) NIC 1 / NIC 2:

0 / 0

Stream state packet lost (Events) NIC 1 / NIC 2:

0 / 0

Stream state wrong timestamp (Events) NIC 1 / NIC 2:

0 / 0

Stream state syntonous sync:

NIC1

Syntonous mode enable:

☐

Offset fine:

☐

Offset in samples:

128 (2.666 ms)

Start channel:

1

Audio Channel Selection:

select

Discovery protocol:

RTSP (RAVENNA Session)

Session NIC 1:

16 channel@NIC 1

Session NIC 2:

Up to 32 input streams can be subscribed. Each stream is organized in a 'RAVENNA session' (SDP = Session Description Protocol) that describes the stream parameters (audio channels, audio format, etc.).

The stream settings allow to adjust the processing of the received audio data (offset, signal routing) and to pick single audio channels from a stream. The receiving of stream data starts once the stream has been enabled.

The settings displayed vary depending on the selected discovery protocol.



TIP

A sample offset of at least doubled packet time (samples per frame) is recommended.

Example: Samples per frame = 16 (0.333 ms) ⇒ Offset ≥ 32 (0.667 ms)

It may be helpful to alter the stream discovery protocol if an expected stream can't be discovered by the device.

Activate stream	Stores parameters and activates or deactivates the receiving of audio data. (Unicast: additionally the negotiation of the connection)
Stream input	Selects one or both NICs used for stream input. Both NICs means input redundancy.
Backup Stream	Selects a backup stream that will act as source in the audio matrix if the current session fails. Switch-over occurs after the defined timeout.
Backup Stream Timeout	Defines timeout [1 s to 120 s] before switch-over to backup stream.
Stream name	Name of stream gathered from SDP
Stream state	Information about stream state: connected not connected receiving data read successfull error
Stream state message	Status info related to stream state.
Stream state offset max	Measured value (maximum). A high value indicates that the media offset of the source might not match the adjusted media offset of the device.
Stream state offset min	Measured value (minimum). The offset should not become negative.
Stream state ip address src NIC 1 / NIC 2	Multicast address of input stream subscribed at NIC 1 / NIC 2. Unicast transmission: IP address of sender.
Stream state connection lost NIC 1 / NIC 2	counter indicates the number of incidents where the network connection was lost (link down)
Stream state packet lost (Events) NIC 1 / NIC 2	counter indicates the number of lost RTP packets
Stream state wrong timestamp (Events) NIC 1 / NIC 2	counter indicates the number of packets with invalid timestamp
Stream state syntonous sync	Displays that the NIC has synchronized to the stream.
Syntonous mode enable	Enables syntonous streaming, synchronisation of senders and receivers must be granted by other means than PTP.

Offset fine	Enables adjustment of offset in increments of one sample.
Offset in samples	Modules output delay of received audio data (input buffer). *
Start channel	Assignment of first stream channel in the audio matrix. E.g. stream with two channels, starting at channel 3 is available at channel 3 & 4 of the routing matrix.
Audio channel selection	Single channels can be picked from a stream, if a stream transports more audio channels than needed or contains 'empty' audio channels.
Discovery protocol	Connection protocol or manual configuration. RTSP = Real Time Streaming Protocol NMOS = Networked Media Open Specifications SAP = Session Announcement Protocol
Session NIC 1	Selection of discovered streams at NIC 1
Session NIC 2	Selection of discovered streams at NIC 2

* if the value 'from SDP' is selected, the offset is calculated automatically based on the packet time value provided by the SDP. The calculated offset is multiplied by an adjustable multiplier.

Synchronous mode enable: ☐


Offset fine: ☐

Offset in samples: from SDP x 3 = 144 (3 ms)

Start channel: 1

Audio channel selection: select 8 of 8 channels selected

Audio channel selection

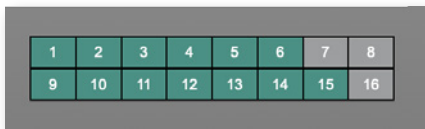

green = stream is active, channel is received and used
grey = channel is ignored

'Start channel' and 'Audio Channel Selection' define the channel mapping in the routing matrix. The channel mapping is displayed in the "Input Streams Overview" on page 17.


NOTE



Selected channels will be placed consecutively in the routing matrix.
Example: An 8 channel stream with only channels 1, 2, 7 and 8 selected will result in a block of 4 audio channels in the matrix.


Selecting audio channels

Audio channel selection is possible when an input stream is inactive.
Selection is marked with blue.

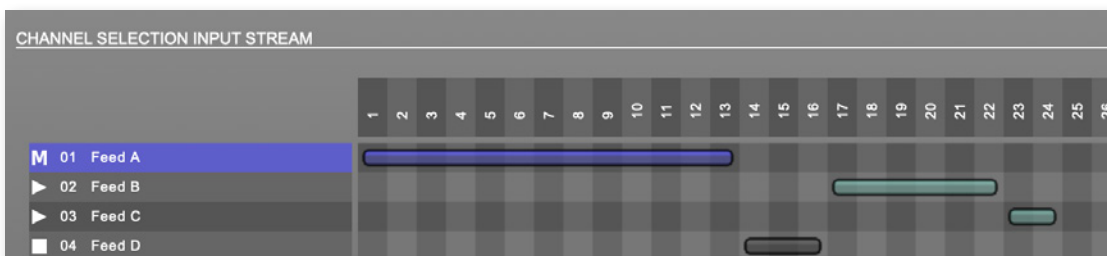


- Select / de-select single channels: click
- Multi-channel selection: hold SHIFT and click (1st) and click (last)
- Multi-channel de-selection: hold SHIFT + CTRL and click (1st) and click (last)

Collision of audio channels

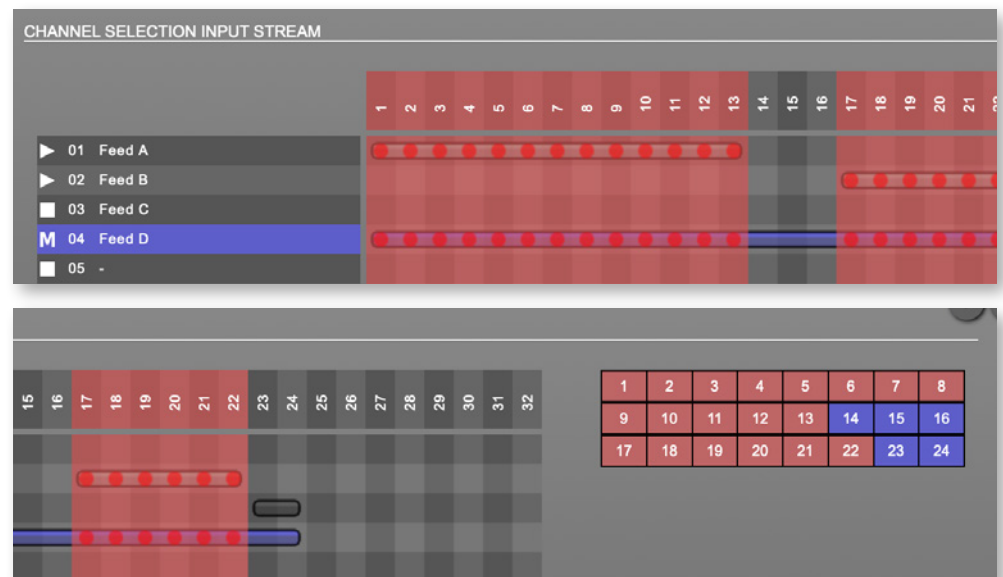

Collisions happen, when the 'start channel' of a stream is mapped to a position that is already covered by another stream.

Overlapping is clearly indicated with red color.

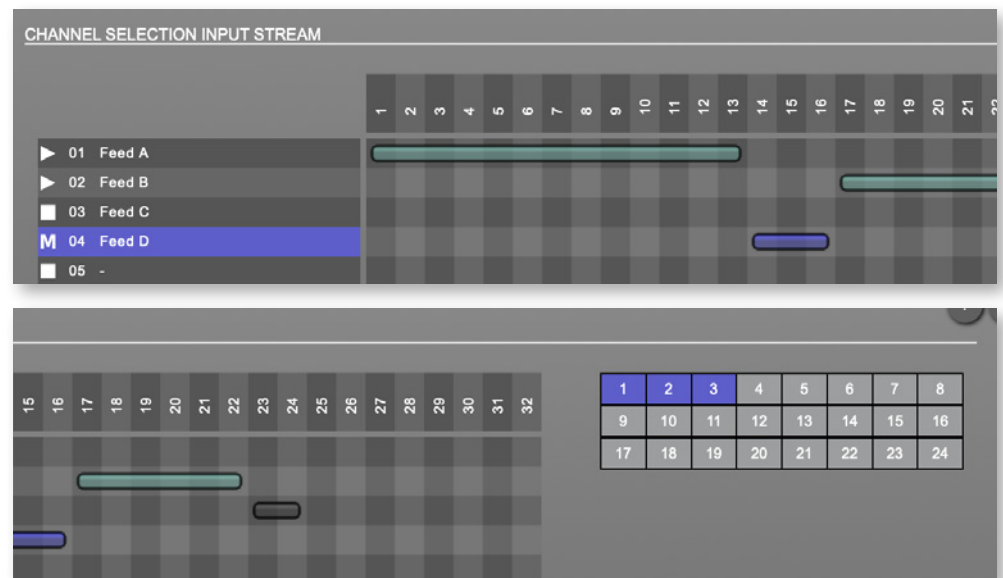

To fix collisions:

- reduce the size (number of selected audio channels)
- move the start channel of the input stream

Stream Discovery in AoIP environments is a colorful mixture of different mechanisms. To serve a successful stream management RAV.IO provides a bunch of options, not making operation easier but effective.

Discovery protocol:
Session NIC 1:
Session NIC 2:

RTSP (RAVENNA Session)
✓ NMOS
SAP (Dante/AES67 Session)
RTSP (RAVENNA URL)
Manual configuration

Refresh

Discovery RTSP (Session)

Discovery protocol:
Session NIC 1:
Session NIC 2:

RTSP (RAVENNA Session)

Discovery RTSP (URL)

Discovery protocol:
URL NIC 1:
URL NIC 2:

RTSP (RAVENNA URL)

rtsp://PRODIGY-RAV-IO-20079e.local:80/by-r

Receive SDP

URL	URL (Uniform Ressource Locator) of the session of the device that is serving streams. Examples: rtsp://192.168.74.44/by-id/1 or rtsp://PRODIGY-RAV-IO.local:80/by-name/Stage_A
Receive SDP	Recalls the stream configuration of the defined session(s).

NOTE

In case the automatic stream announcement and discovery of RAVENNA streams fails or cannot be used in a given network, the stream's SDP file can also be obtained via an RTSP URL.



Discovery SAP

Discovery protocol:

SAP (Dante/AES67 Session) ▾

Session NIC 1:

▾

Session NIC 2:

Stage A@NIC 2 ▾

SAP is used in Dante environments.

Discovery NMOS

Discovery protocol:

NMOS ▾

Session NIC 1:

▾

Session NIC 2:

[20079e|2] Ambience@NIC 2 ▾

Refresh

Session	[MAC Address of sender] stream name @NIC
Refresh	Initiates a scan for available streams.

NMOS is suited for use in SMPTE ST 2110 environments.

Manual Configuration

Discovery protocol:

Manual configuration

Import SDP file

Import SDP

Stream name (manual):

Feed A

Number of channels:

16

RTP payload ID:

98

Audio format:

L24

Media offset:

0

NIC 1

NIC 2

Dst IP address:

239.69.1.10

SSM (Source Specific Multicast):

☐

Src IP address:

192.168.72.4

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address:

239.2.0.5

SSM (Source Specific Multicast):

☐

Src IP address:

0.0.0.0

RTP dst port:

5004

RTCP dst port:

5005

Stream name (manual)	Stream name for display in status view and matrix. Can be specified individually, different than the name gathered from the SDP.
Number of channels	Number of audio channels in the stream
RTP-Payload-ID	RTP-Payload-ID of the audio stream (Real-Time Transport Protocol). Describes the format of the transported content.
Audio Format	Stream's audio format (L16 / L24 / L32 / AM824)
Media Offset	Offset between stream's timestamp and PTP-clock
Dst IP address	Multicast IP address of audio stream
SSM	Activate Source Specific Multicast filter for this stream.*
Src IP address	IP address of sending device.*
RTP dst port	Stream's destination port for RTP
RTCP dst port	Stream's destination port for RTCP (Real-Time Control Protocol)

* An RTP packet contains the IP address of the sender (source IP) and the stream's multicast address (destination IP). With SSM activated the receiver only accepts RTP packets of a certain destination IP that are originated by a sender with the specified source IP.

NOTE



RTP Payload ID must match between sender and receiver.

Session Description Protocol

Stream discovery set to 'Manual configuration' requires to define the stream parameters manually or to import an SDP data via .sdp-file or prompt.

Import SDP File	Imports SDP data from .sdp file
Import SDP	Imports SDP data from a prompt

Example of SDP data:

```
v=0
o=- 1 3144252155 IN IP4 192.168.72.82
s=Studio A
t=0 0
m=audio 5004 RTP/AVP 98
i=Stream 1
c=IN IP4 239.69.1.1/128
a=source-filter: incl IN IP4 239.69.1.1 192.168.72.82
a=rtpmap:98 L24/48000/8
a=sync-time:0
a=clock-domain:PTPv2 0
a=framecount:48
a=recvonly
a=mediaclk:direct=0
a=ts-refclk:ptp=IEEE1588-2008:A0-BB-3E-FF-FE-20-09-C4:0
a=ptime:1
a=maxptime:1
```




TIP

The SDP data of an output stream can be copied from the output stream settings.

This page is left blank intentionally.

Status - Output Streams

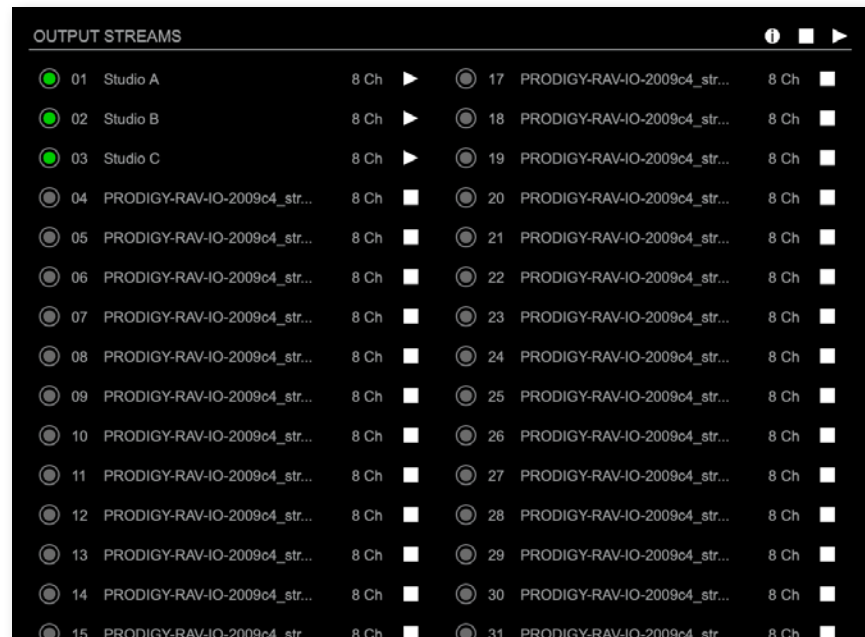

The device can send up to 32 streams. The overview displays the basic information of each stream.

01 to 32	State of outgoing streams ☐ (OFF) = stream not activated ☒ (ON) = stream activated, sending data ☒ (ON) = stream activated, stream output via both NICs selected, but one NIC is not linked to the network.
01 to 32 Name	Name of stream defined in the settings
01 to 32 xx ch	Number of audio channels transported by the stream
01 to 32 ■ ▶	Activate or deactivate stream. ▶ = stream activated ■ = stream deactivated
OUTPUT STREAMS ■ ▶	Click to activate or deactivate all streams. ▶ = activate all streams ■ = deactivate all streams (requires confirmation)
OUTPUT STREAMS i	Click i to display output streams overview

Hyperlinks:

- Name (p 32)

Mouse over:

- LED- indicating stream state

Output Streams Overview



Bars informing about stream size and position in channel matrix.

- green = stream active
- grey = stream not active

TIP



AES67 Streams

To create output streams for interoperability in AES67 environments please consult the information document [Info- AES67 Streams](#).

TIP



SMPTE 2110-30 /-31 Streams

To create output streams for interoperability in SMPTE ST 2110 environments please consult the information document [Info- ST2110-30 Streams](#).

Both documents are available at <http://academy.directout.eu>.

Output Stream Settings

01 - OUTPUT STREAM SETTINGS

Activate Stream:

☐

Stream Output:

NIC 1

Stream name (ASCII):

Studio A

RTSP URL (HTTP tunnel) (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 1):

rtsp://192.168.72.82:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 2):

-

copy

RTSP URL (HTTP tunnel) (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 1):

rtsp://192.168.72.82:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 2):

-

copy

RTSP URL (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 1):

rtsp://192.168.72.82/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 2):

-

copy

RTSP URL (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-id/1

copy

RTSP URL (by-id) (NIC 1):

rtsp://192.168.72.82/by-id/1

copy

RTSP URL (by-id) (NIC 2):

-

copy

SDP:

v=0
o=- 1 2150447299 IN IP4 192.168.72.82
s=Studio A
t=0 0
m=audio 5004 RTP/AVP 98

copy

RTSP unicast:

☐

RTP payload ID:

98

Samples per Frame (packet time):

48 (1 ms)

Audio format:

L24

Start channel:

1

Number of channels:

8

Audio channel selection:

view

NIC 1

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.1

NIC 2

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.2

Up to 32 output streams can be sent to the network. Each stream is organized in a session (SDP = Session Description Protocol) that describes the stream parameters (audio channels, audio format, etc.).

Each stream may be labelled with an individual stream name (ASCII) which is useful for enhanced comfort at organizing the setup.

The stream settings allow to adjust the processing of the sent audio data (blocks per frame, format, signal routing, ...). The sending of stream data starts once the stream has been activated.

The stream URL can be copied in various formats.

Once the stream is active, the SDP data is displayed and may be copied from the window or downloaded via <http://<rav-io>/sdp.html?ID=<stream no.>>.

Streaming Multicast

- Multicast sends a single stream from the source to a multicast group address (e.g., 239.x.x.x).
- Any number of receivers can join that group and receive the same stream simultaneously.
- The source only transmits one copy of the data regardless of how many receivers are listening, making it bandwidth-efficient for one-to-many distribution.
- It requires network infrastructure that supports IGMP snooping/querying to manage group membership.

Streaming Unicast

- Unicast sends a dedicated, point-to-point stream from the source directly to one specific receiver's IP address.
- Each receiver requires its own dedicated stream and sender, so bandwidth usage on the sender scales linearly with the number of connected receivers.
- Unicast works on virtually any IP network (also WAN) without special multicast infrastructure, making it simpler to deploy - especially across subnets / routers that may not pass multicast traffic.

See also "Unicast- RTSP" on page 36 and "Unicast- Manual Configuration" on page 38 .

01 - OUTPUT STREAM SETTINGS

Activate Stream:

☐

Stream Output:

NIC 1

Stream name (ASCII):

Studio A

RTSP URL (HTTP tunnel) (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 1):

rtsp://192.168.72.82:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 2):

-

copy

RTSP URL (HTTP tunnel) (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 1):

rtsp://192.168.72.82:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 2):

-

copy

RTSP URL (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 1):

rtsp://192.168.72.82/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 2):

-

copy

RTSP URL (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-id/1

copy

RTSP URL (by-id) (NIC 1):

rtsp://192.168.72.82/by-id/1

copy

RTSP URL (by-id) (NIC 2):

-

copy

SDP:

v=0
o=- 1 2150447299 IN IP4 192.168.72.82
s=Studio A
t=0 0
m=audio 5004 RTP/AVP 98

copy

RTSP unicast:

☐

RTP payload ID:

98

Samples per Frame (packet time):

48 (1 ms)

Audio format:

L24

Start channel:

1

Number of channels:

8

Audio channel selection:

view

NIC 1

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.1

NIC 2

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.2

Activate stream	Stores parameters and activates or deactivates the receiving of audio data. (Unicast: additionally the negotiation of the connection)
Stream Output	Selects one or both NICs used for stream output. Both NICs means output redundancy.
Stream name (ASCII)	Individually defined name of an output stream. It is used in the URL which is indicated in different ways below.*
RTSP URL (HTTP tunnel) (by-name) / (by id)	Current used RTSP-URL of stream with HTTP port used for RTSP, stream name or stream id.
RTSP URL (by-name) / (by id)	Current used RTSP-URL of stream with stream name or stream id.
SDP	SDP data of the active stream.
RTSP Unicast	If activated, the stream is sent as RTSP unicast.**
RTP payload ID	Stream's payload id
Samples per Frame	Number of blocks containing payload (audio) per ethernet frame - see packet time on p 20.
Audio format	Stream's audio format (L16 / L24 / L32 / AM824) ***
Start channel	Assignment of first stream channel from the audio matrix (position). E.g. stream with eight channels, starting at channel 3 is fed from channel 3 to 10 of the routing matrix.
Number of channels	Number of audio channels in the stream (size).
Audio channel selection <select> / <view>	Graphical display of stream size and position <select> define size and position (stream inactive) <view> display size and position (stream active)
RTP dst port	Stream's destination port for RTP
RTCP dst port	Stream's destination port for RTCP (Real-Time Control Protocol)
Dst IP address (IPv4)	Stream's IP address for multicast (should be unique for each stream) or unicast (if RTSP unicast is off).

* Only ASCII characters are allowed.

** A unicast stream can only be received by one device. If a device is already receiving the stream, further connection calls by other clients are answered with 'service unavailable' (503). See also "Unicast- RTSP" on page 36

*** L16 = 16 bit audio / L24 = 24 bit audio / L32 = 32 bit audio /
AM824 = standardized according to IEC 61883, allows AES3 transparent transmission (SMPTE ST 2110-31).

Unicast Stream - RTSP connection method

Sender announces stream via RTSP and waits for a receiver request for a connection. The stream connection is controlled by the receiver.

01 - OUTPUT STREAM SETTINGS

Activate Stream:

☐

Stream Output:

NIC 1

Stream name (ASCII):

Studio A

RTSP URL (HTTP tunnel) (by-name):	rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-name/Studio%20A	copy
RTSP URL (HTTP tunnel) (by-name) (NIC 1):	rtsp://192.168.72.82:80/by-name/Studio%20A	copy
RTSP URL (HTTP tunnel) (by-name) (NIC 2):	-	copy
RTSP URL (HTTP tunnel) (by-id):	rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-id/1	copy
RTSP URL (HTTP tunnel) (by-id) (NIC 1):	rtsp://192.168.72.82:80/by-id/1	copy
RTSP URL (HTTP tunnel) (by-id) (NIC 2):	-	copy
RTSP URL (by-name):	rtsp://PRODIGY-RAV-IO-2009c4.local/by-name/Studio%20A	copy
RTSP URL (by-name) (NIC 1):	rtsp://192.168.72.82/by-name/Studio%20A	copy
RTSP URL (by-name) (NIC 2):	-	copy
RTSP URL (by-id):	rtsp://PRODIGY-RAV-IO-2009c4.local/by-id/1	copy
RTSP URL (by-id) (NIC 1):	rtsp://192.168.72.82/by-id/1	copy
RTSP URL (by-id) (NIC 2):	-	copy

SDP:

copy

RTSP unicast:

☐

Samples per Frame (packet time):

48 (1 ms)

Audio format:

L24

Start channel:

1

Number of channels:

8

Audio channel selection:

select

NIC 1

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

192.168.72.83

NIC 2

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.2

How:

- Output Stream: Enable RTSP Unicast (checkbox)
- Output Stream: Use one of the RTSP URLs provided and activate stream
- Input Stream: Discovery 'RTSP (RAVENNA URL)', enter the RTSP URL and activate input stream

Effects:

- Automatic setup: no need to manually configure all transport parameters like UDP ports or destination IP address
- Receiver monitoring: the sender is notified about activity of the receiver and stops when the receiver stops
- Cleaner networking: avoids permanent blind transmission
- Discovery: RTSP unicast works across routed subnets if the receiver knows the sender's RTSP URL.
 - Note: RTSP announcements are available
- Setup is compatible with common RAVENNA / AES67 unicast workflows.

Unicast Stream - Manual Configuration

Manual unicast can be used without the RTSP unicast checkbox on devices running HW 0.38 / SW 1.30 or later. In this mode, the stream is configured similarly to multicast, but with a unicast destination address and matching receive port.

01 - OUTPUT STREAM SETTINGS

Activate Stream:

☐

Stream Output:

NIC 1

Stream name (ASCII):

Studio A

RTSP URL (HTTP tunnel) (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 1):

rtsp://192.168.72.82:80/by-name/Studio%20A

copy

RTSP URL (HTTP tunnel) (by-name) (NIC 2):

-

copy

RTSP URL (HTTP tunnel) (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 1):

rtsp://192.168.72.82:80/by-id/1

copy

RTSP URL (HTTP tunnel) (by-id) (NIC 2):

-

copy

RTSP URL (by-name):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 1):

rtsp://192.168.72.82/by-name/Studio%20A

copy

RTSP URL (by-name) (NIC 2):

-

copy

RTSP URL (by-id):

rtsp://PRODIGY-RAV-IO-2009c4.local/by-id/1

copy

RTSP URL (by-id) (NIC 1):

rtsp://192.168.72.82/by-id/1

copy

RTSP URL (by-id) (NIC 2):

-

copy

SDP:

copy

RTSP unicast:

☐

RTP payload ID:

98

Samples per Frame (packet time):

48 (1 ms)

Audio format:

L24

Start channel:

1

Number of channels:

8

Audio channel selection:

select

NIC 1

NIC 2

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

192.168.72.83

RTP dst port:

5004

RTCP dst port:

5005

Dst IP address (IPv4):

239.69.1.2

How:

- Output Stream: Enter the receiver's unicast IP address (Dst IP address).
- Output Stream: Enter a unique RTP destination port for each stream that the receiver will listen on.
- Output Stream: Activate stream and copy SDP
- Input Stream: Discovery 'Manual configuration', import SDP and activate input stream

Effects:


- Full RTCP-based receiver monitoring is not available in manual unicast mode. The sender transmits audio after activation, even when the stream is not activated in the receiver.
- Manually configured unicast connections only work from firmware version hw_0.38_sw_1.30 and later

Unicast RTSP vs Manual

Mode	Stream start	Port handling	Receiver monitoring
RTSP unicast	Receiver opens RTSP session	Negotiated automatically	Managed by session/control protocol
Manual unicast	Configured manually	Configured manually	Limited, implementation-specific

This page is left blank intentionally.

Audio channel selection

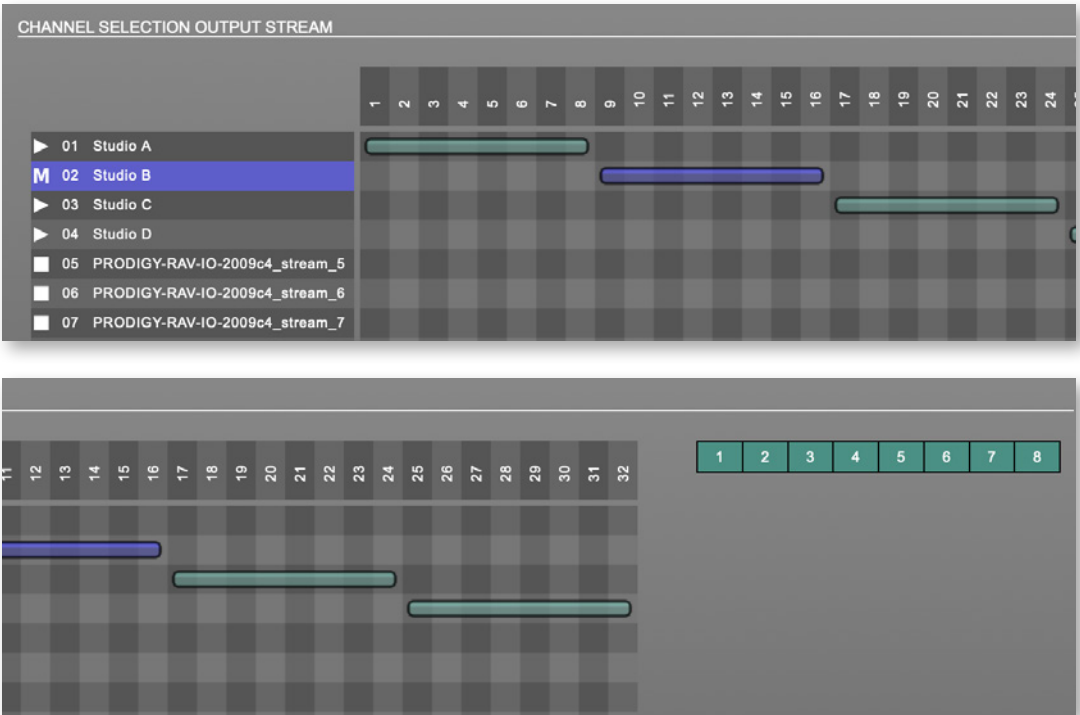

Overview of all output streams, their size and position in the routing matrix.

- green = stream active, display of size and position
- blue = stream inactive, size and position can be modified

Start channel:

9

position

Number of channels:

8

size

NOTE



Selected channels will be placed consecutively in the routing matrix.
Example: An 8 channel stream, starting at channel 9 will feed channels 9 to 16 of the routing matrix..

Advanced - Overview


The screenshot displays the 'ADVANCED' tab of the RAV.IO configuration interface. It is divided into several sections:

- PTP SETTINGS:** Includes dropdowns for PTP Input (NIC 1), IP mode (Multicast), Mode (slave only), and Profile (media E2E).
- PTP CURRENT SETTINGS:** Shows Clock class (248), Accuracy (254), Clock domain NIC 1 (0), Clock domain NIC 2 (1), Priority 1 (-), Priority 2 (-), Announce (2 s (1)), Sync (-), Min delay request (1 s (0)), Min pdelay request (1 s (0)), Announce receipt timeout (3), One step clock (no), Slave only (yes), and Delay mechanism (E2E).
- CURRENT PTP MASTER:** Displays Clock class (248), Accuracy (254), Clock domain (0), Priority 1 (128), Priority 2 (128), GMID (A0-B8-3E-FF-FE-20-0B-86), Sync (NIC 1), and IPv4 (192.168.72.4).
- PTP UNICAST:** Includes Auto Detect GM (on), Grant duration (sec) (30), and Grandmaster IP (0.0.0.0).
- PTP CLOCK SETTINGS:** Shows No PTP switch 1 Gbit/s (0), No PTP switch 100 Mbit/s (0), and Outlier filter (off).
- PTP STATISTIC:** Displays PTP state (slave), PTP jitter (0.02 us), PTP offset (-0.00 us), PTP master to slave (0s 715ns), PTP slave to master (0s 710ns), Current PTP time (TAI) (1970-01-01 03:08:13), and Current PTP time (TAI) (RAW) (11293s 772767150ns).
- NETWORK ADVANCED SETTINGS:** Includes Multi stream rx (yes), MDNS announcement (RX/TX), SAP announcement (RX/TX), Multicast audio loopback (no), Multicast RTPC (yes), Disable channel collision detection (no), Keep audio channel mapping (no), and a Network settings Apply button.
- PTP JITTER:** A graph showing jitter over time from -4 min to 0 min, with a y-axis ranging from -1000 ns to 1000 ns.

The tab 'ADVANCED' is divided into several sections:

- PTP SETTINGS - definition of PTP source, mode and profile
- PTP PROFILE CURRENT SETTINGS - definition of a customized PTP profile
- CURRENT PTP MASTER - monitoring PTP characteristics
- PTP STATISTIC - monitoring device's PTP state, jitter and delay
- PTP CLOCK SETTINGS - definition of adaption algorithms to reduce jitter
- NETWORK ADVANCED SETTINGS - definition of network and QoS characteristics
- PTP JITTER - graphical display of measured PTP jitter

Advanced - PTP Settings

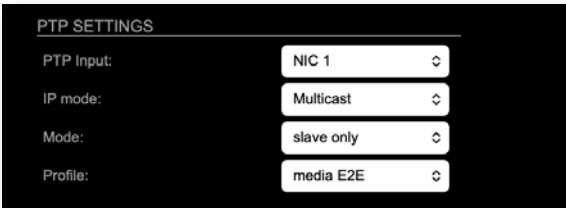

PTP Input	Selects one or both network ports used for PTP input. Both ports means input redundancy. *
IP Mode	Multicast = Sync messages and delay request are sent as multicast message to every node within the network.
	Hybrid = Sync messages are sent as multicast, delay requests are sent as unicast messages directly to the Grandmaster or Boundary Clock. **
	Unicast = Sync messages are sent as unicast, delay requests are sent as unicast messages directly to the Grandmaster or Boundary Clock. ***

- * Using redundant PTP-operation a switch-over is triggered not only at signal loss of the Grandmaster but depends on the quality of the PTP clock. Changes (e.g. clock class) are observed permanently and the algorithm decides for the best signal present.
- ** Hybrid Mode reduces the workload for all nodes in the network as they do not receive the (unnecessary) delay requests from other devices anymore.
- *** Unicast Mode may help when multicast routing is not possible within the network. As an opposite to the Hybrid Mode it increases the workload of the grandmaster since sync messages must be sent to each single slave individually.

PTP SETTINGS

PTP Input:
NIC 1

IP mode:
Multicast

Mode:
slave only

Profile:
media E2E

Mode	auto = PTP-clock master / slave configuration is auto negotiated between devices in the network. Module's master / slave state may change automatically. slave only = PTP-clock slave configuration is preferred. Module clocks to another device in the network preferred master = PTP-clock master configuration is preferred. Module acts as network grandmaster. Priority values are adjusted automatically to ensure Grandmaster status. * master only = PTP-clock master is forced. **
Profile	Selects predefined PTP profile (default E2E, default P2P, media E2E, media P2P, SMPTE 2059-2) or activates customized PTP profile.

* If more than one device announces as PTP-clock master the network Grandmaster is determined following the Best Master Clock Algorithm (BMCA).

** 'Master only' configures the device to act as Unicast Grandmaster. This setting is available only with PTP Mode set to 'unicast'



NOTE

PTP profile ,customized' allows for individual adjustment of the PTP parameters. If profile is set to ,media' or ,default' the PTP parameters cannot be altered and are displayed only. Factory default setting is PTP Media Profile E2E.

For the PTP profile 'SMPTE 2059-2' the mode is restricted to 'slave only'.

Advanced - PTP Unicast

PTP UNICAST

Auto Detect GM:

on

Grant duration (sec):

30

Grandmaster IP:

0.0.0.0

Auto Detect GM	on = enables the automatic detection of the grandmaster * off = IP address of grandmaster needs to be defined manually
Grant duration (sec)	Time period during which the slave receives sync messages from the grandmaster.**
Grandmaster IP	IP address of the grandmaster.***

* 'Auto Detect GM' is a proprietary function and might not be supported by 3rd party GMs.

** Depending on the temporary workload of the grandmaster the negotiation may fail.

*** This value is used only with 'Auto Detect GM' set to <off>.

About PTP Unicast

Since the BMCA is not available with PTP unicast, the PTP properties of the devices require some extra configuration.

Example:

Grandmaster	IP Mode Unicast, Mode Master only
Slave(s)	IP Mode Unicast, Mode Slave Only, Auto Detect GM ON, Grant Duration 30 sec

Advanced - PTP Profile Customized Settings

PTP CURRENT SETTINGS	
Clock class:	248
Accuracy:	254
Clock domain NIC 1:	0
Clock domain NIC 2:	1
Priority 1:	-
Priority 2:	-
Announce:	2 s (1)
Sync:	-
Min delay request:	1 s (0)
Min pdelay request:	1 s (0)
Announce receipt timeout:	3
One step clock:	no
Slave only:	yes
Delay mechanism:	E2E

The settings become available with PTP profile set to 'customized'.

Clock class	PTP-clock's class according to IEEE 1588 [read only]
Accuracy	PTP-clock's accuracy according to IEEE 1588 [read only]
Clock domain NIC 1	PTP-clock's domain at NIC 1
Clock domain NIC 2	PTP-clock's domain at NIC 2
Priority 1	Priority setting for master announcement (the smaller the value the higher the priority)
Priority 2	If value 'Priority1' (and other PTP-clock parameters) of more than one device in the network match: Priority setting for master announcement (the smaller the value the higher the priority)
Announce	Intervall of sending announce-packets for auto-negotiation.
Sync	Intervall of sending sync-packets to the PTP-clock slaves in the network.
Min delay request	Intervall of sending End-To-End packets of PTP-clock slave to PTP-clock master. To determine the offset slave-to-master.
Min pdelay request	Intervall of sending Peer-To-Peer packets between two PTP-clocks. To determine the offset master-to-slave and slave-to-master.
Announce receipt timeout	Number of missed announce-packets (threshold) to reinitialize the negotiation of PTP-clock master.

One step clock	Timestamp of PTP-clock is integrated in PTP-sync-packets. No follow-up packets are sent. No = Two step clock is used
Slave only	Yes = PTP-clock is always slave.
Delay mechanism	E2E - Offset slave-to-master is determined by End-To-End packets. P2P - Offset master-to-slave and slave-to-master is determined by Peer-To-Peer packets.

Advanced - Current PTP Master

CURRENT PTP MASTER	
Clock class:	248
Accuracy:	254
Clock domain:	0
Priority 1:	128
Priority 2:	128
GMID:	A0-BB-3E-FF-FE-20-0B-86
Sync:	NIC 1
IPv4:	192.168.72.4

Monitoring display only.

Clock class	PTP-clock's class according to IEEE 1588
Accuracy	PTP-clock's accuracy according to IEEE 1588
Clock domain	PTP-clock's domain at selected NIC
Priority 1	Priority setting for master announcement (the smaller the value the higher the priority)
Priority 2	If value 'Priority1' (and other PTP-clock parameters) of more than one device in the network match: Priority setting for master announcement (the smaller the value the higher the priority)
GMID	ID of current Grandmaster
Sync	Selected NIC for PTP clock
IPv4	IP address of Grandmaster

Advanced - PTP Statistic

PTP STATISTIC	
PTP state:	slave
PTP jitter:	0.02 us
PTP offset:	-0.00 us
PTP master to slave:	0s 715ns
PTP slave to master:	0s 710ns
Current PTP time (TAI):	1970-01-01 03:08:13
Current PTP time (TAI) (RAW):	11293s 772767150ns

Monitoring display only.

PTP state	Information about current PTP-clock state: initialize error deactivated receiving data pre master master passive not calibrated slave
PTP jitter	PTP-clock jitter in microseconds (μs)
PTP offset	Offset relative to PTP-clock master
PTP master to slave	Absolute offset master-to-slave in nanoseconds
PTP slave to master	Absolute offset slave-to-master in nanoseconds
Current PTP time (TAI):	Date and time information from GPS source*
Current PTP time (TAI) (RAW):	RAW TAI from GPS source*

* Temps Atomique International- if no GPS source is available for PTP time-stamping, the date / time display starts at 1970-01-01 / 00:00:00 after every reboot of the device.

Advanced - PTP Clock Setting

PTP CLOCK SETTINGS

No PTP switch 1 Gbit/s:

0

↕

No PTP switch 100 Mbit/s:

0

↕

Outlier filter:

off

↕

No PTP Switch 1 Gbit/s	Adapted PTP-clock algorithm to reduce clock jitter using 1 GB network switches without PTP support. Max. number of 1 Gbit/s switches: less than 10
No PTP Switch 100 Mbit/s	Adapted PTP-clock algorithm to reduce clock jitter using 100 MB network switches without PTP support. Max. number of 100 Mbit/s switches: 1
Outlier filter	The outlier filter discards irregular PTP sync timestamps to prevent clock instability on the follower side.* Values: on, off

* The outlier filter rejects anomalous PTP sync timestamps that can destabilize the follower clock, particularly in setups without a PTP-aware switch or with grandmasters exhibiting irregular timestamping behavior. It is disabled by default.

TIP

Enable the outlier filter when operating without a PTP-aware switch or when experiencing synchronization instability with third-party grandmasters.



Advanced - Network Advanced Settings

NETWORK ADVANCED SETTINGS

Multi stream rx:

MDNS announcement:

SAP announcement:

Multicast audio loopback:

Multicast RTCP:

Disable channel collision detection:

Keep audio channel mapping:

Network settings:

Multi stream rx	If activated, the device allows to subscribe to the same multicast stream more than one time - default: off
MDNS announcement	Announcement of streams via MDNS can be controlled to optimize network traffic or CPU load. Values: Off, RX, TX or RX/TX **
SAP announcement	Announcement of streams via SAP can be controlled to optimize network traffic or CPU load. Values: Off, RX , TX or RX/TX **
Multicast audio loopback	If activated, output streams (TX) can be subscribed (RX) by the device itself. Values: Yes, No
Multicast RTCP	Allows to disable RTCP for multicast streams. Values: Yes, No ***
Disable channel collision detection	Allows to disable the warnings in the audio channel selection overview. Values: Yes, No ****
Keep audio channel mapping	Preserves audio channel selection of input streams when a different stream is connected. Values: yes, no
Network settings Apply	Confirms and saves changes being made. Reboot required.

* AES67 specifies EF, but some implementations use EF for Audio streaming. To avoid overlapping of RTP and PTP packets in the same queue CS6 has been chosen as default.

** RX = receive, TX = transmit, RX/TX = receive and transmit

*** RTCP is always active for unicast streams.


**** Useful if backup streams are configured with overlapping routing on purpose.

NOTE



Source-Specific Multicast (SSM) support for IGMP v3, v2 and v1 (SSM via protocol only in IGMP v3, SSM via internal filtering is applied for IGMP v2 and v1) - see "Source Specific Multicast" on page 27.

Advanced - PTP Jitter

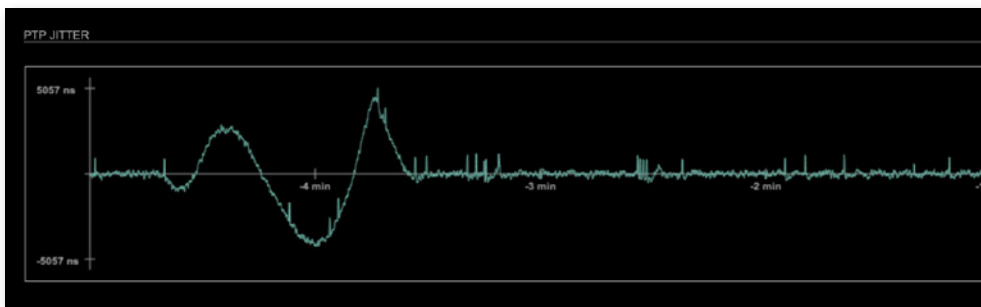

Graphical display of measured PTP jitter.

NOTE



An error message next to Jitter measurement is displayed if delay requests are not being answered by Grandmaster.

NMOS - Overview

The screenshot shows the NMOS configuration page with tabs for STATUS, ADVANCED, NMOS, LOGGING, ABOUT, STATISTIC, SWITCH, and TOOLS. The NMOS tab is active, displaying settings for two network interfaces, NIC1 and NIC2, and additional settings.

NIC1 Settings:

- NMOS port: 3210
- NMOS registry connected: ☒
- Search mode NMOS registry: ☐ Multicast
- Unicast DHCP: ☐
- Unicast: ☐
- Registry domain name:
- Manually: ☐ Registry IP address: 0.0.0.0, Registry port: 3210, Version: v1.3

NIC2 Settings:

- NMOS port: 3212
- NMOS registry connected: ☒
- Search mode NMOS registry: ☐ Multicast
- Unicast DHCP: ☐
- Unicast: ☐
- Registry domain name:
- Manually: ☐ Registry IP address: 0.0.0.0, Registry port: 3210, Version: v1.3

INTERNAL Settings:

- NMOS OOB connected: ☒
- Disable stream during config: ☐
- NMOS node config optimized for: single NIC (default)
- Seed id: 9454695-afaw-4f5c-81fa-39a3c0973b1
- Generate new seed id:

Buttons:

- Settings (NIC1 + NIC2):
- Manufacturer Settings NMOS Ports:

NMOS provides a family of specifications related to networked media for professional applications. It is produced by the Advanced Media Workflow Association (AMWA).

Support for NMOS is introduced with the AoIP Module version SW 0.17 / HW 0.46 according to the specifications:

- IS-04 Discovery & Registration (v1.3)
- IS-05 Device Connection Management (v1.1)

IS-04 allows control and monitoring applications to find the resources on a network. Resources include Nodes, Devices, Senders, Receivers, Sources, Flows...

IS-05 provides a transport-independent way of connecting Media Nodes.

More information: <https://specs.amwa.tv/nmos/>

NMOS port - NIC1 & NIC2

The port entries for NIC1 and NIC2 are pre-configured by default. Modifications are possible but not necessary.

This close-up shows the NMOS port configuration for two network interfaces:

- NIC1:** NMOS port: 3210
- NIC2:** NMOS port: 3212

NMOS port
(NIC1 + NIC2)

Port address. Reboot required after modification.

NMOS registry - Search mode

NMOS registry connected: ☒

Search mode NMOS registry:

Multicast: ☐

Unicast DHCP: ☐

Unicast: ☐

Registry domain name:

Manually: ☐

Registry IP address:

Registry port:

Version:

NMOS registry connected: ☒

Search mode NMOS registry:

Multicast: ☐

Unicast DHCP: ☐

Unicast: ☐

Registry domain name:

Manually: ☐

Registry IP address:

Registry port:

Version:

Multicast	use mDNS to determine and connect to the registry server
Unicast DHCP	discovery on the DNS server (DNS-SD) using the domain given by DHCP
Unicast	discovery on the DNS server (DNS-SD) using a custom domain name
Registry domain name	custom domain name of the registry server
Manually	manual configuration of registry server
Registry IP address	IP address provided by network administrator
Registry port	Port provided by network administrator
Version*	Support of NMOS API version Values: v1.0, v1.1, v1.2, v1.3


* registry versions are not backwards compatible.

NOTE



DNS-SD uses the first returned entry and does not take priorities into considerations.

NMOS - Internal



NMOS OOB connected	LED displaying the connection status with the OOB host. ○ (OFF) = not connected ● (ON) = connected
--------------------	---

OOB stands for out-of-band, the control happening out of the media streaming network interfaces NIC 1 and NIC 2 of a RAV.IO module.


NMOS OOB allows control of RAV.IO modules hosted by a PRODIGY via the management port (MGMT) of the device.



TIP

More info about the use of NMOS OOB is available in the document:
[info_nmos_oob.pdf](#)

NMOS - Additional Settings

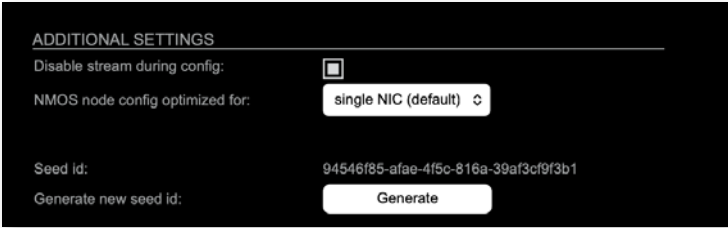

Disable stream during config	Automatically disable and re-enable streams when settings are changed via NMOS (recommended)
NMOS node config optimized for	NMOS node config data is sent via: - single NIC (default) - the system can be configured for redundancy, but only one connection is active. If the first connection (NIC1) fails, the connection through NIC2 will become active. - redundant NIC - both NICs are connected constantly, this live redundancy might cause errors on some registries (same info coming from two different paths, conflicting timestamps).
Seed id	Unique identifier, subordered entities are derived from the seed id.
Generate new seed id Generate	Generates a new unique identifier. Reboot required.

NMOS uses a logical data model based on the JT-NM Reference Architecture to add identity, relationships and time-based information to content and broadcast equipment. Hierarchical relationships group related entities, with each entity having its own identifier.

The identifiers are persistent across restarts of the device in order to make them useful over a period of time longer than a single production deployment.

New identifiers may be generated manually if required.

Logging



The tab 'LOGGING' displays logging depending on the 'Log Settings'. The logging can be enabled individually for different protocols, each of with an adjustable filter. An adjustable log level specifies the information detail of each entry.

To save a log the content of the view can be copied and pasted to a text document.

Log Level

0	log data
1	level and log data
2	protocol, level and log data
3	protocol, process-id of requesting process, process-id of running process, level and log data
4	protocol, process-id of requesting process, process-id of running process, level, processor time in ticks and log data
5	protocol, process-id of requesting process, process-id of running process, level, processor time in ticks, file name and line and log data

Protocol Types

BASE	Basic operation of module
DNS	Domain Name System
FLASH	Process for updating the module
MDNS	Multicast Domain Name System
NMOS	Network Media Open Specification
PTP	Precision Time Protocol
RS232	Serial Protocol
RTCP	Real Time Control Protocol
SAP	Session Announcement Protocol
TCP	Transmission Control Protocol
Log timestamp	Defines the time source and format used for log entries*

* requires Log Level 4 and higher.

Log Filter


NONE	logging disabled
ERROR	error occurred
WARNING	warnings- condition that may lead to unwanted behavior or an error
INFO 1	log info* + warning + error
INFO 2	log info* + warning + error
INFO 3	log info* + warning + error
INFO 4	log info* + warning + error

* increasing amount of log info starting from ‚INFO 1‘

Log Operation

Save log	Downloads the current log entries to a text-file (log.txt).
Clear log	Deletes all log entries without further prompt.
Scroll lock	Interrupts automatic scrolling of the list view to allow copying the content to a text file via copy & paste. If scrolling is stopped for a longer period of time the display may not list all entries.

Statistic

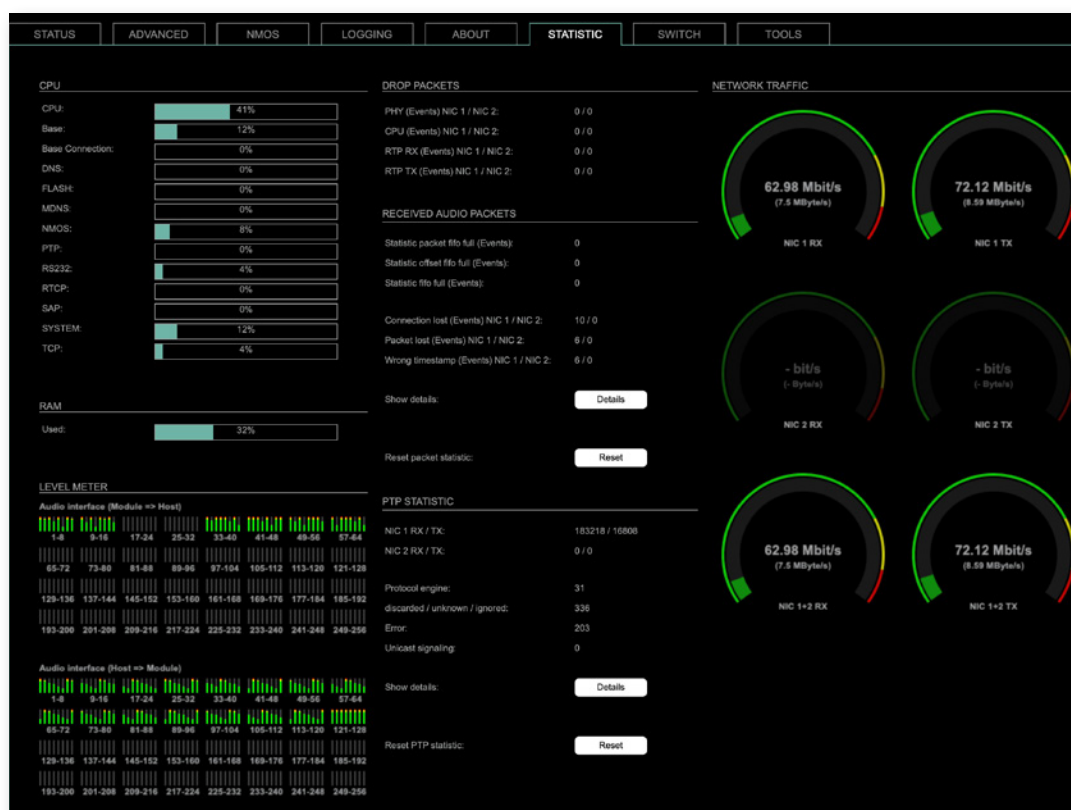

The tab 'STATISTIC' displays an overview of the CPU load of the particular processes, an error counter and a monitor display to indicate the incoming (RX) and outgoing (TX) network traffic on both network ports individually.

Details	Displays a list of input streams and related events (connection lost, packet lost, wrong timestamp) of received audio packets.
Reset	Resets the packet statistic

See "Protocol Types" on page 57.

Level Meter

Two level meters display audio signal that is:


- received by the module via network and sent to the host (module to host)
- received by the module from the host (host to module)



NOTE

This feature is introduced with RAV2 firmware HW 0.38 / SW 1.30. Check also the firmware of the base module (SNA, DNA) for proper operation.

Switch

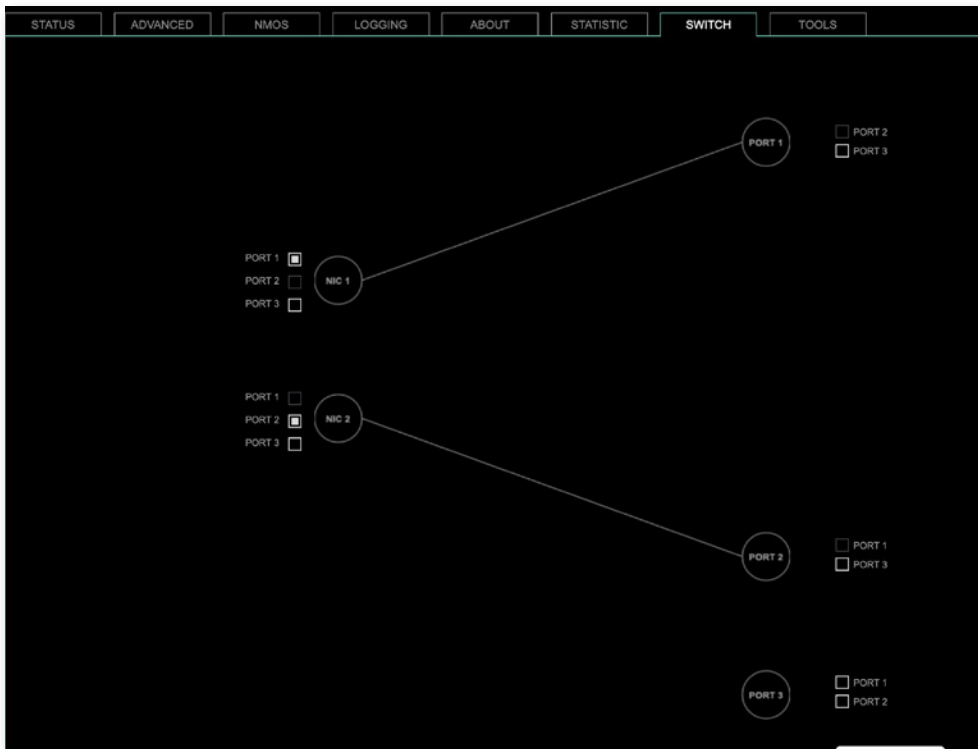

The three physical network ports (Port 1 to 3) are managed by two independent internal network interfaces (NIC 1 / NIC 2).

Factory default:

Port 1 = NIC 1 (192.168.0.1), Port 2 = NIC 2 (DHCP) - see p 14.

NOTE

If you want to use a port that is not assigned to a NIC e.g. to patch the device's management port (MGMT) into the audio network, you can link it to one of the audio ports.

NOTE

To access the module's control page it is required to connect the management network to one of the ports that is directly attached to a NIC - see next page.

To give the very best PTP synchronisation performance, the switch incorporates advanced timestamping between the external PORTS and the internal NICs. As a consequence, the on-board switch cannot be used to connect other PTP devices via a single shared connection to the wider network.

Please connect all other PTP devices directly to your system's network switch.

Tools

PING

The tab 'TOOLS' offers a generator to ping any IP address (IPv4) from either NIC 1 or NIC 2. The result is displayed at the 'Output'.



IP address (IPv4)	Enter IP address (IPv4) to be pinged
Interface	Select NIC 1 or NIC 2
Start	Sends ping to the specified IP address from selected NIC.

LLDP



Link Layer Description Protocol - LLDP is a standard Layer 2 discovery protocol that allows directly connected network devices to exchange identity and capability information, enabling automated network configuration and management.

- **Sending**
The RAV2 sends LLDP packets containing its chassis ID (MAC address), port ID (interface name), management IP address, and device type. NIC1 takes priority for the management address.
Available since HW 0.27 / SW 0.91.
- **Neighbor Info**
The RAV2 can also receive and display LLDP data from connected switches - visible in the WebUI (TOOLS tab) and logged every 30 seconds in the BASE debug log. Useful for identifying which switch/port the module is connected to.
Available since HW 0.38 / SW 1.26.



SWITCH - Configurations, Examples

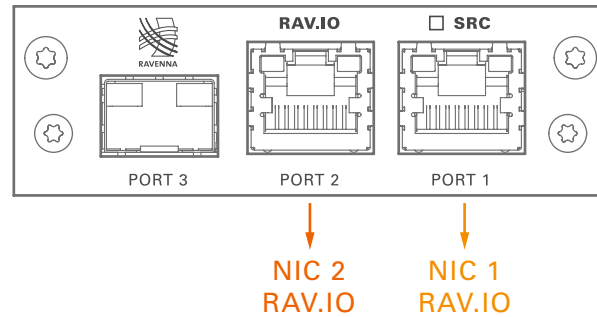



RAV.IO Audio & Control via Port 1 and Port 2

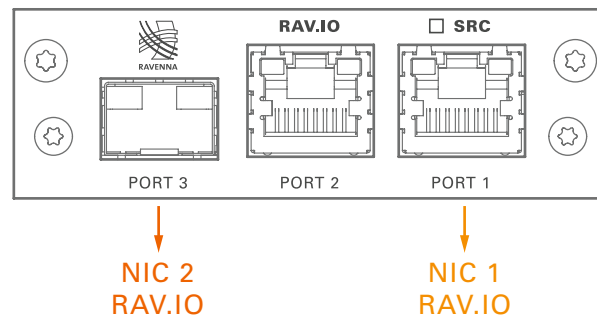



RAV.IO Audio & Control via Port 1 and Port 3

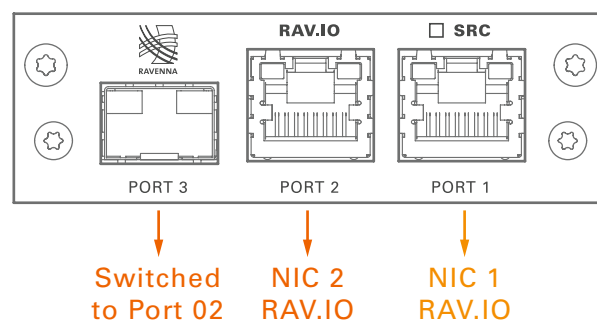



RAV.IO Audio & Control via Port 1 and Port 2
Extra ethernet traffic via Port 3 (NIC 2)

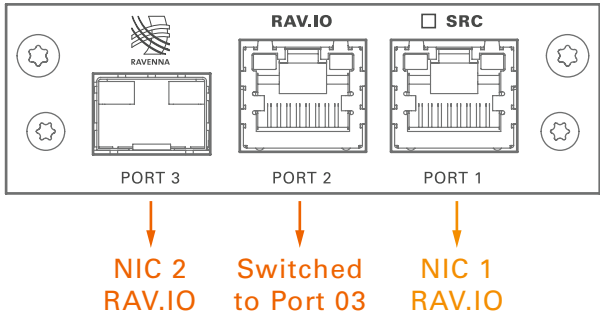

RAV.IO Audio & Control via Port 1 and Port 3
Extra ethernet traffic via Port 2 (NIC 2)

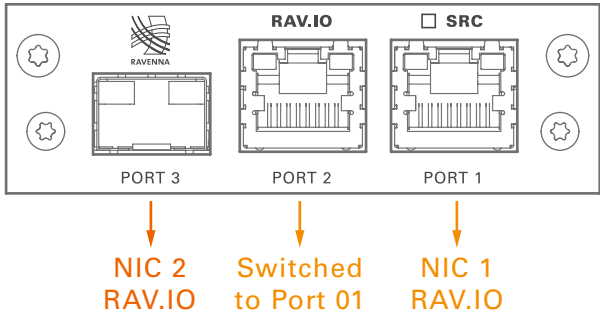

RAV.IO Audio & Control via Port 1 and Port 3
Extra ethernet traffic via Port 2 (NIC 1)*

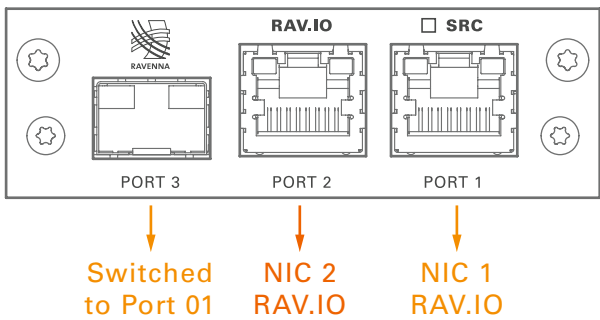


RAV.IO Audio & Control via Port 1 and Port 2
Extra ethernet traffic via Port 3 (NIC 1)

* see example on the following page.

Device Management over the audio network


This configuration is exemplary to illustrate the possibility to integrate the management data that is used to control the device into the audio network.

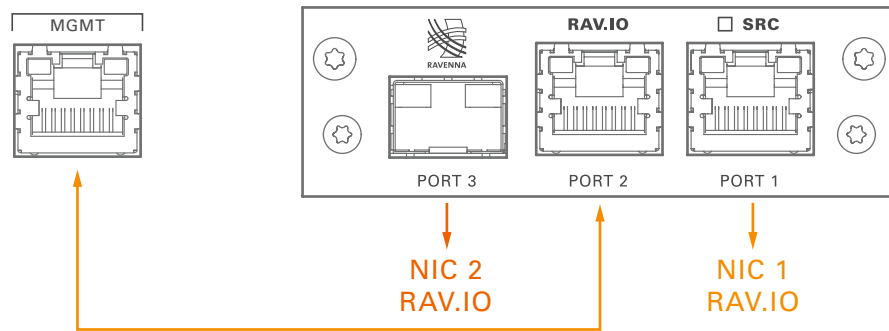

- connect the MGMT port of the device with Port 2 of the RAV.IO
- connect the RAVENNA network to Port 1 of the RAV.IO
- connect the RAVENNA network to Port 3 of the RAV.IO (if needed)

Switch configuration

RAV.IO Audio & Control via Port 1 and Port 3
Extra ethernet traffic via Port 2 (NIC 1)



RAV.IO - Firmware Update


The RAV.IO module is updated via network.

Visit www.directout.eu and navigate to a product page in the modules section and select the matching module.

Download:

- RAV.IO Firmware

Open the control page of the module and navigate to the tab STATUS and click SETTINGS in the top right corner (p 12).

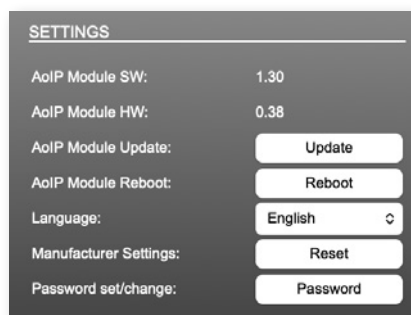

Click 'Update' and browse to the update file after unzipping first.

Example: rav_io_hw_0_38_sw_1_30.update

Follow the instructions displayed and reboot the device after the firmware update.

WARNING!



It is strongly recommended to backup the device configuration (Save Preset) before running any update.

Index

A

AES67	31
Audio channel selection	
input streams	23
output streams	41

B

BMCA	44
------------	----

C

CIDR	9
------------	---

D

Direct routing	11
Discovery	25

F

Firmware Update	
RAV.IO	65

G

GMID	9
Grant duration	45

H

Hybrid Mode	43
-------------------	----

I

IP Mode	
Hybrid	43
Multicast	43
Unicast	43
IS-04. see NMOS	
IS-05. see NMOS	

L

Level Meter	58
LLDP	61
Lock Device	14
Logging	56
Log timestamp	57

N

Naming Input Stream	27
Network Monitor	58
NMOS	52

O

Offset	22
Offset <> Packet time	20
Outlier filter	49

P

Password	14
Preset	15
PTP Jitter	51
PTP Modes	44
PTP Profile	7

R

Reset	
Factory	13, 14
Password	14

S

Session Description Protocol	33
SMPTE 2059-2	44
Source Specific Multicast	27
ST 2110-30	31
Stream input	21
name	27
Switch- Configuration	
RAV.IO	62

U

Unicast Mode	43
Unicast Stream	35
Manual Configuration	38
RTSP connection method	36

This page is left blank intentionally.

DirectOut GmbH

Hainichener Str. 66a
09648 Mittweida
Germany

T: +49-3727-5650-00
M: info@directout.eu
www.directout.eu